




# Power over Ethernet (PoE)

For I-Series 4 for Android

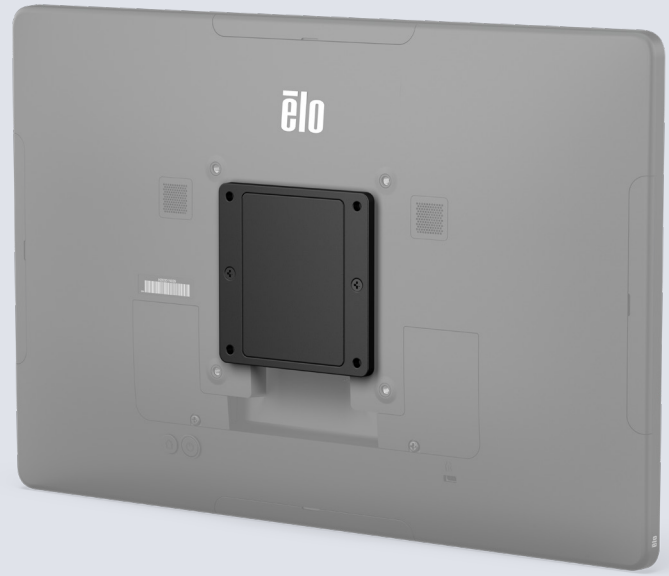

2-year warranty



Compatible with I-Series 4 for Android



Power with POE

## Product Overview

The Power-over-Ethernet (POE) module offers a convenient and cost effective way to deliver power to the I-Series 4 for Android. The module allows you to put a DC voltage onto specific pairs of the Ethernet cable so that devices connected to the network can use it as a power source. So instead of requiring a power drop which can be expensive, you can run a low voltage network to simplify installation of solutions for shelf signage and AV applications like conference room schedulers or AV control displays.

## Power over Ethernet (PoE)

Specifications	
Color	Black
Compatibility	I-Series 4 for Android
Supported Standards	IEEE802.3, 10BASE T/1000BASE-T IEEE802.3u, 100BASE-TX, IEEE802.3at, Power over Ethernet
Transmission Media	RJ-45 (10/100BASE-T): Cat.3, 4, 5 UTP/STP RJ-45 (1000BASE-T): Cat.5, 5e, 6, 7 UTP/STP
Efficiency	Isolated power supply efficiency >85%
Customizable Settings	Panel Brightness, Wi-Fi/ Bluetooth, Audio, USB Port1 (type A), USB Port2 (type C), MicroUSB3, MicroUSB4, MicroUSB5, MicroUSB6, GPIO, External Display
Dimensions	Without 21.5" spacer: 3.46" x 3.46" x 0.74" / 88 mm x 88 mm x 18.8 mm With 21.5" spacer: 4.53" x 4.53" x 0.74" / 115 mm x 115 mm x 18.8 mm
Shipping Dimensions	Single box: 6.57" x 6.45" x 2.52" / 167 mm x 164 mm x 64 mm
Weight	Without 21.5" spacer: 0.218 lbs / 0.099 kg With 21.5" spacer: 0.262 lbs / 0.119 kg
Shipping Weight	2.87 lbs / 1.3 kg
Temperature	Operating: 0°C to 40°C (32°F to 104°F) Storage: -20°C to 70°C (-4°F to 158°F) Protection: +/-15KV of Ethernet isolation for ESD/Surge protection OTP, SCP, OCP protection Isolation: 1500Vrms
Humidity (Non-Condensing)	Operating: 20% to 80% Storage: 5% to 95%
Regulatory Approvals and Declarations	UL/cUL (US), FCC (US), IC (Canada), CE (Europe), CB (International), VCCI, MIC (Japan), RCM (Australia)
Mounting Options	VESA 75mm and 100mm
Warranty	2 years
What's in the Box	POE Module Quick Install Guide 2x M4x16mm flat head screws (in a ziplock bag, labeled) 4x M4x18mm flat head screws (in a ziplock bag, labeled) 4x M4x18mm pan head screws (in a ziplock bag, labeled) 1x POE Spacer Hot plug warning label

## Ordering Information

Part Number	Availability
E413396	Worldwide

Learn more about Elo at [EloTouch.eu](http://EloTouch.eu).

### Americas

Tel +1 408 597 8000  
elosales.na@elotouch.com

### Europe (EMEA)

Tel +32 16 930 136  
EMEA.Sales@elotouch.com

### Asia Pacific

Tel +86 (21) 3329 1385  
EloAsia@elotouch.com

Elo reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Elo and the Elo logo are either trademarks or registered trademarks of Elo Touch Solutions, Inc. All other trademarks are the property of their respective owners.

© 2021 Elo Touch Solutions, Inc. All rights reserved. 21061AES00108

